



FILTRI A SCHERMO FCY/FCV SCREEN FILTERS



FILTRI A SCHERMO


SCREEN FILTERS

Il filtro a schermo è utilizzato negli impianti di irrigazione a goccia e microirrigazione.
 E' un filtro a funzionamento con rete filtrante in poliestere e la cartuccia di sostegno in acciaio inox Aisi 304, costruito interamente in acciaio verniciato con **vernice epossidica** o **inox AISI 304**.
 I collegamenti sono disponibili con attacco filettato o flangiato.
 Sono disponibili tutti i gradi di filtrazione (da 5 a 500 µ) e la pressione massima di esercizio è di 8 bar.


*Screen filters are mostly used in filtering systems for drop irrigation and micro-irrigation.
 Filtration is made through polyester filtering net and stainless steel AISI 304 supporting cartridge.
 They are completely made of **painted steel (epoxide painting)** or **stainless steel AISI 304**.
 Connectors are available with threading or flange.
 Filtration from 5 up to 500 microns.
 The maximum working pressure is 8 bar.*

Versione: > ACCIAIO INOX AISI 304 > VERNICIATO


Version: > STAINLESS STEEL AISI 304 > PAINTED STEEL

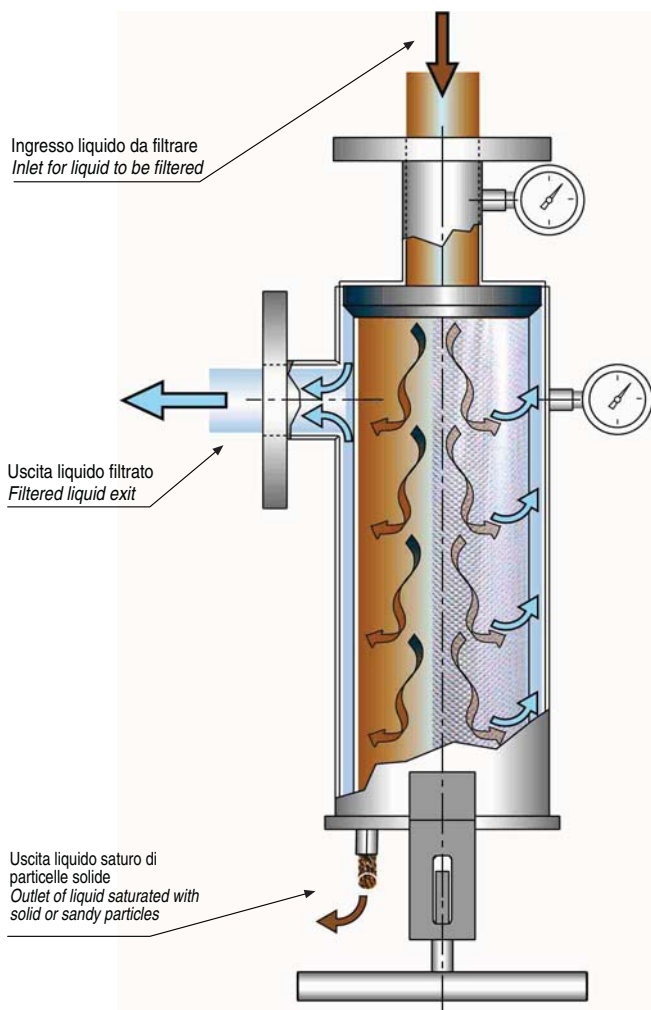

| Codice Code | ØA | B | C | D | E | F | Portata lt/min Flow rate lt/min |
|-------------|-------|-----|-----|------|-----|-----|---------------------------------|
| FCY00001 | Ø 168 | 548 | 548 | Ø 2" | 140 | 670 | 250-500 |
| FCY00002 | Ø 168 | 548 | 548 | Ø 2" | 140 | 670 | 250-500 |
| FCY00003 | Ø 168 | 648 | 534 | Ø 3" | 140 | 670 | 420-650 |
| FCY00004 | Ø 168 | 648 | 534 | Ø 3" | 140 | 670 | 420-650 |
| FCY00005 | Ø 168 | 748 | 534 | Ø 4" | 140 | 670 | 650-1300 |
| FCY00006 | Ø 168 | 748 | 534 | Ø 4" | 140 | 670 | 650-1300 |

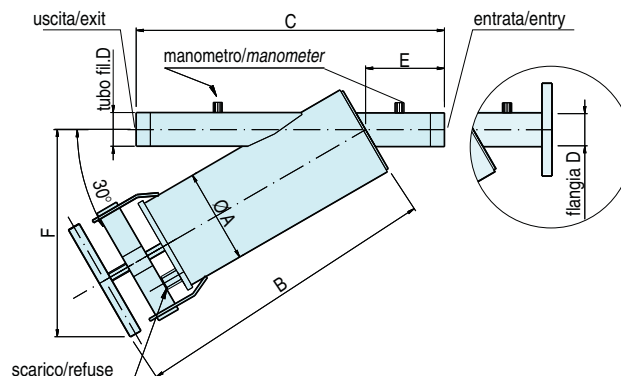

| Codice Code | ØA | B | C | D | Portata lt/min Flow rate lt/min |
|-------------|-------|-----|-----|------|---------------------------------|
| FCV00001 | Ø 168 | 500 | 660 | Ø 2" | 250-500 |
| FCV00002 | Ø 168 | 500 | 660 | Ø 2" | 250-500 |
| FCV00003 | Ø 168 | 600 | 760 | Ø 3" | 420-650 |
| FCV00004 | Ø 168 | 600 | 760 | Ø 3" | 420-650 |
| FCV00005 | Ø 168 | 700 | 860 | Ø 4" | 650-1300 |
| FCV00006 | Ø 168 | 700 | 860 | Ø 4" | 650-1300 |

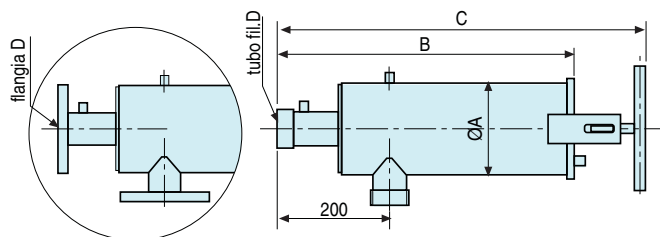

Accessori/Accessories



| Codice Code | Descrizione Description |
|-------------|---|
| CFC00001 | cestino per filtro 2" / 2" filter supporting cartridge |
| CFC00002 | cestino per filtro 3" / 3" filter supporting cartridge |
| CFC00003 | cestino per filtro 4" / 4" filter supporting cartridge |
| GUAFC001 | guarnizione inferiore / lower gasket |
| GUAFC002 | guarnizione superiore a labbro / upper gasket |
| TCF00001 | calza filtro 2" tela / filtering net for 2" filter - 100 Micron |
| TCF00002 | calza filtro 3" tela / filtering net for 3" filter - 100 Micron |
| TCF00003 | calza filtro 4" tela / filtering net for 4" filter - 100 Micron |
| TCF00004 | calza filtro 2" tela / filtering net for 2" filter - 130 Micron |
| TCF00005 | calza filtro 3" tela / filtering net for 3" filter - 130 Micron |
| TCF00006 | calza filtro 4" tela / filtering net for 4" filter - 130 Micron |



I dati, le descrizioni e le caratteristiche indicate, non impegnano OFFICINE MECCANICHE PARENTI s.r.l. che si riserva il diritto di modificare i propri prodotti ed i relativi accessori in qualsiasi momento.

The data, descriptions and features indicated, are not binding for OFFICINE MECCANICHE PARENTI s.r.l.
 The products and relative accessories may be modified at any time.

OFFICINE MECCANICHE PARENTI srl
 Via Emilia 51/C
 40011 Anzola Emilia (BO) ITALY

Tel. +39 051 73 21 90 - Fax. +39 051 73 21 80
 info@omparenti.com - www.omparenti.com